BATHROOM Luna Thermostatic Shower Set (Rough & Trim) GF4.000A-LM31S





# Information

• Thermostatic Shower Spout Flow Rate 2.1 gpm @ 60 psi

### Finishes






Polished Ste Chrome (Sat

Steelnox® (Satin Nickel)



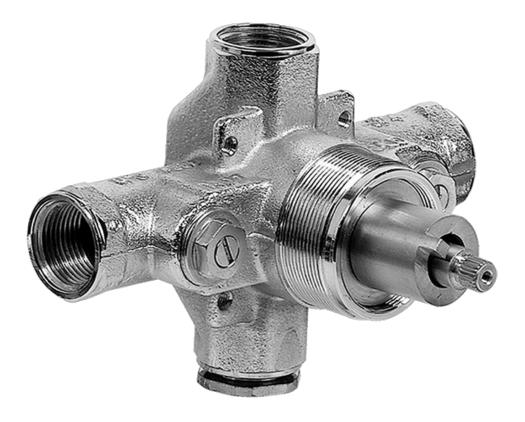

- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge

#### Finishes





Polished Chrome

Steelnox® (Satin Nickel)





- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve
- ADA


## Finishes





Polished Steelnox® Chrome (Satin Nickel)



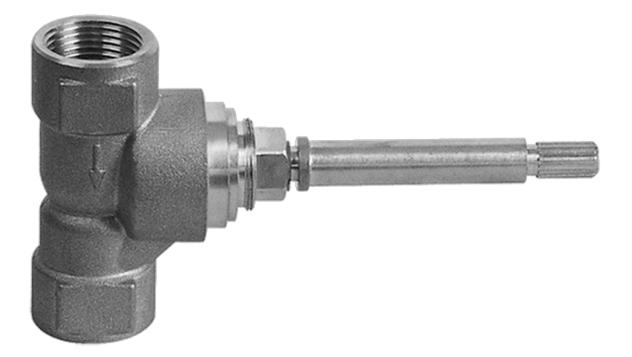

- 3/4" universal inlets/outlets with female threads
- Supplied with protective plastic cover

## Finishes






Polished Chrome

Steelnox® (Satin Nickel)



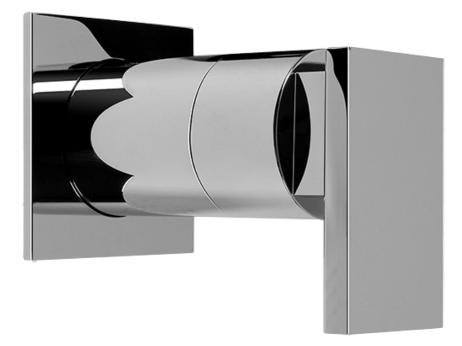

- Single metal handle
- Decorative trim plate
- Use with G-8070 or G-8075 thermostatic stop/volume control rough valve
- To complete package, you must order rough valve
- ADA

### Finishes





Polished Chrome

Steelnox® (Satin Nickel)





## Finishes



Polished

Chrome




Steelnox® (Satin Nickel)

# **G-8700** LUNA Series

3-3/8"(86mm)x5/8"(15mm)

53-3/8"(1356mm)

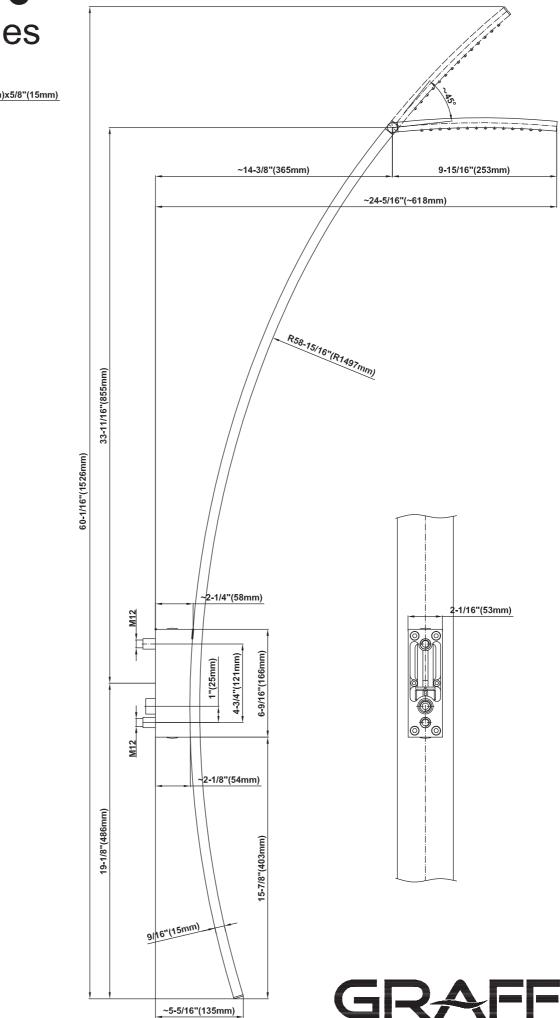

CUTTING

EDGE

DESI

®

GN





## Finishes



Polished

Chrome



Steelnox® (Satin Nickel)