

# AQ5.000A-LM40S



# **Information**

- Wall-mounted, battery-powered controller and holder; controls LED chromotherapy lighting
- Rainfall, rain curtain and cascade water functions
- No-clog, easy-clean spray nozzles
- Showerhead flow rate ≤2.5 gpm
- Includes trim plate & handle and diverter valve
- ADA



Polished Chrome





# **Information**

- 18.4 gpm @ 60 psi
- 3/4" universal inlets/outlets with female threads
- Built-in service stops
- Complete serviceability from front of all units
- Supplied with protective plastic cover
- Thermostatic valve uses a paraffin wax cartridge



Polished Chrome



G-8041-LM40S-T




# Information

- Single metal handle
- Decorative trim plate
- Use with G-8000 or G-8005 thermostatic rough valve
- To complete package, you must order rough valve
- ADA




Polished Chrome

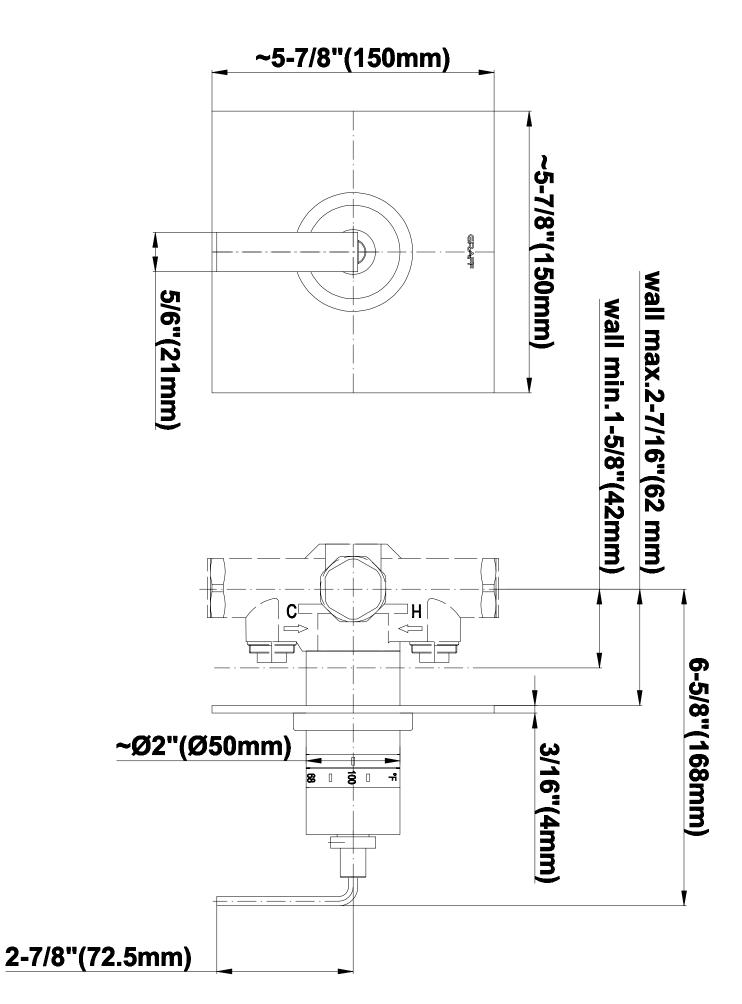





G-8050

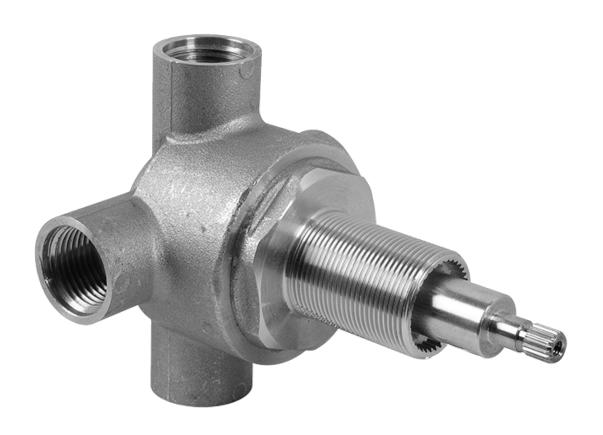


# Information


- Intended for use with Thermostatic Shower Systems
- 1/2" 3-way diverter valve with 3 outlets and off function
- Universal inlets/outlets with female threads
- Operates one function at a time
- Supplied with protective plastic cover
- CALGreen compliant depending on functions
- CALGreen



Polished Chrome

# G-8050

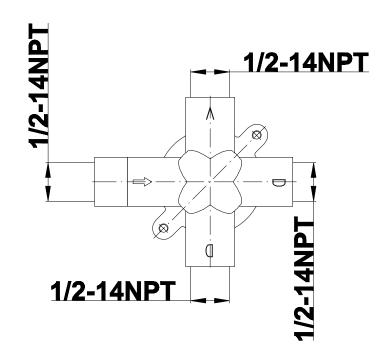

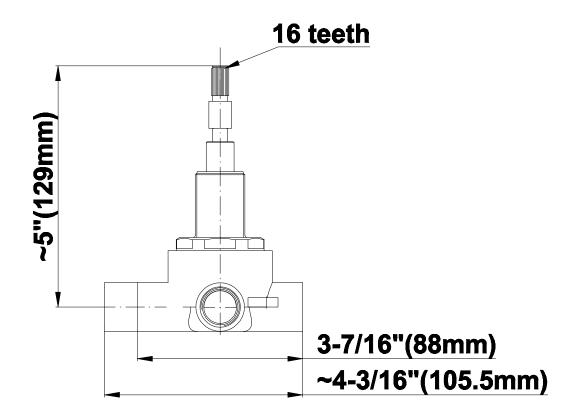





G-8066-LM40S-T




# Information


- Single metal lever handle
- Decorative trim plate WITH off function
- Use with G-8050 (4-port thermostatic diverter valve w/stop)
- To complete package, you must order rough diverter valve
- ADA



Polished Chrome

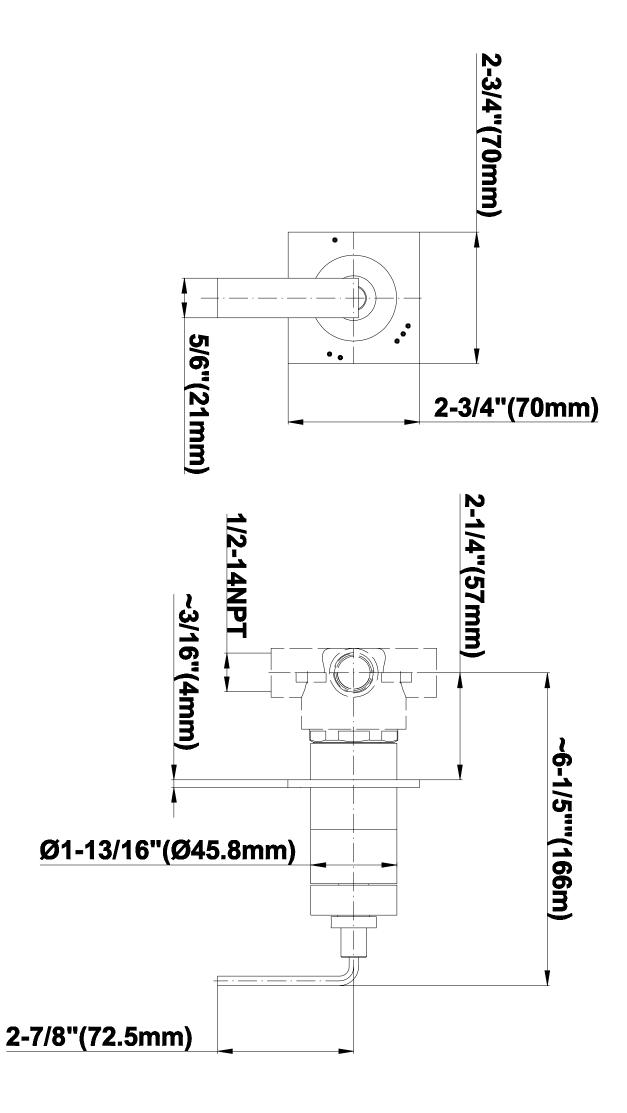



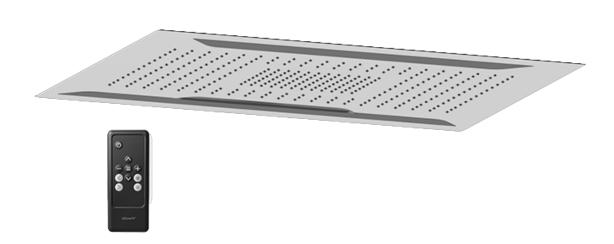

# Information

- Rainfall, rain curtain and cascade water functions
- 6-color LED chromotherapy lighting
- Battery powered LED controller with wall-mounted holder
- No-clog, easy-clean spray nozzles
- Showerhead flow rate ≤ 1.8 max gpm
- Requires a separate water supply line for each feature
- CALGreen



Polished Chrome







- Rainfall, rain curtain and cascade water functions
- 6-color LED chromotherapy lighting
- Battery powered LED controller with wall-mounted holder
- No-clog, easy-clean spray nozzles
- Showerhead flow rate ≤ 1.8 max gpm
- Requires a separate water supply line for each feature

# Available Finishes

Stainless Polished
G-8221-SP

### Code Compliance

CALGreen

#### Warranty

Limited lifetime warranty

For complete warranty information go to https://www.graff-faucets.com/en/info/faqs

17-11/16" (450 mm)

23-5/8" (600 mm)