


Monomando bañera a suelo (parte externa)

- Floor-mount installation
- Aerated spout flow rate ~7 gpm @ 45 psi
- Handshower flow rate ≤ 1.5 max gpm
- 8-7/8" spout reach
- 38-1/16"-41-1/4" approximate height
- Includes handshower with 59" spiral flexible hose (PVD finishes use 59" flex hose)
- Optional in-line pressure balancing valve

- Oro 24K
- Oro cepillado 24K
- Oro cepillado 24K/Onyx PVD®
- Latón cepillado PVD®
- Negro_Architectural Black™
- Níquel cepillado
- Onyx cepillado PVD®
- Gunmetal PVD®
- Negro Mate
- Bronce oliva
- Onyx PVD®
- Latón pulido PVD®
- Cromo pulido
- Cromo Lucido/Onyx PVD®
- Níquel pulido
- Níquel pulido/Onyx PVD®
- Blanco

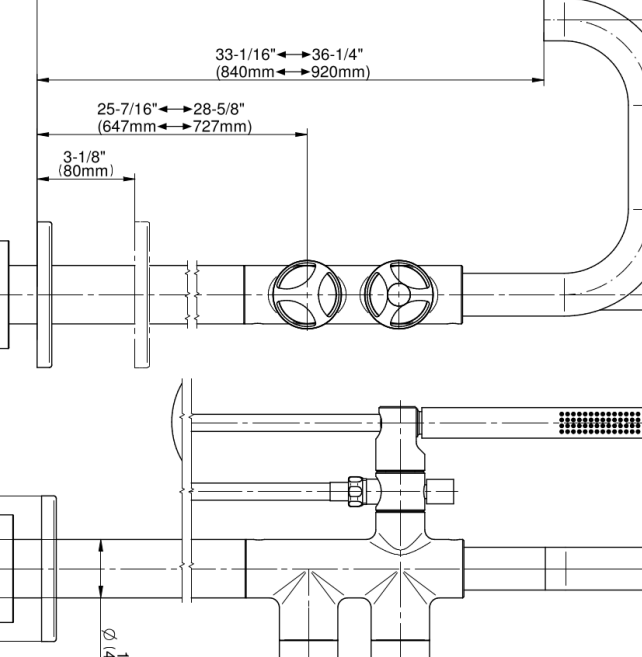

Technical drawing of the 1000 Series 1/2" (12.7mm) gas control valve, showing two views: a side view (top) and a front view (bottom).

Side View Dimensions:

- Overall length: 37-3/16" ↔ 40-5/16" (944mm-1024mm)
- Distance from inlet to first solenoid: 33-1/16" ↔ 36-1/4" (840mm ↔ 920mm)
- Distance between solenoids: 25-7/16" ↔ 28-5/8" (647mm ↔ 727mm)
- Distance from inlet to second solenoid: 3-1/8" (80mm)
- Overall height: 8-7/8" (225mm)

Front View Dimensions:

- Overall width: 4-1/16" (119mm)
- Distance from inlet to first solenoid: 4-1/4" (108mm)
- Distance from inlet to second solenoid: 1-7/8" (48mm)
- Distance from inlet to third solenoid: 2-15/16" (75mm)
- Overall height: 4-1/16" (119mm)